

# WALL FAN HEATER

RWF SERIES



## THE GOLD STANDARD IN FAN HEATERS

You won't find anything better than this efficient, durable and noise-free forced-air heater. The PULSAIR™ is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). In addition, it can be mounted vertically or horizontally, directing the air flow upward or downward and to the right or to the left, respectively. Last, the slim-line PULSAIR™ can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for the hallway and bathroom, it can also be installed in other parts of the house, such as the office or in commercial buildings. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 347 V, the PULSAIR™ is recognized and recommended by those in the know.



### THE QUIETEST WALL FAN HEATER ON THE MARKET

347 V MODEL AVAILABLE

NICHROME ELEMENT FOR INSTANT HEAT

MULTIPLE INSTALLATION OPTIONS

RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

THE MOST RESISTANT GRILLE ON THE MARKET

### IDEAL FOR:

HALLWAY, BATHROOM, LOCKER ROOM, OFFICE

### COLOURS

- standard: white, soft white
- ORORA (optional): denim blue, midnight blue, turquoise, moss green, canary yellow, red, orange, anodized aluminum paint, gravel gray, charcoal, espresso, black (refer to [page 8 of the catalogue](#))

### FINISH

epoxy-polyester powdercoat

### MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan - 40 CFM (500 W to 1000 W models) - 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset

### ELEMENT

nichrome element produces instant heat

### CONTROL

- built-in thermostat (optional)
- wall thermostat (not included) - the use of an electronic thermostat is strongly recommended

### INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions


## ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
RWFT1**	built-in single pole thermostat [120 V-347 V]	29.00
RWFT2*	built-in double pole thermostat [120 V-347 V]	40.25
RWFSAW	surface adapter (white)	39.25
RWFSASW	surface adapter (soft white)	39.25
RWFSAS	surface adapter (silver)	39.25

\* Add W for white or SW for soft white

\* Supplied with a white knob (with a white grille) and a soft white knob (with a soft white grille)

### FOUR INSTALLATION OPTIONS

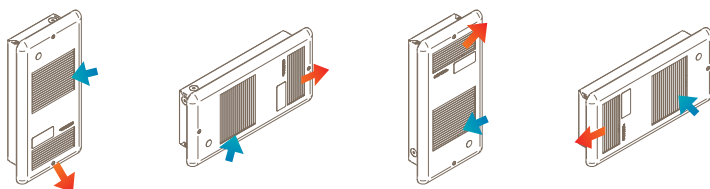

# TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		24 V CONTROL		POWER	VOLTAGE	FLOW	THROW DISTANCE		HEAT RISE		WEIGHT	
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS	VOLTS	CFM	M	FT.	°C	°F	KG	LB
RWF0501	149.00	---	---	---	---	500	120	40	2	6'6"	30	54	2.7	6
RWF0508	149.00	---	---	---	---	500	208	40	2	6'6"	30	54	2.7	6
RWF0502	149.00	---	---	---	---	500/375	240/208	40	2	6'6"	30	54	2.7	6
RWF0507	149.00	---	---	---	---	500	277	40	2	6'6"	30	54	2.7	6
RWF0503	188.00	RWF0503T	217.00	RWF0503C24	229.00	500	347	40	2	6'6"	30	54	2.7	6
RWF0751	154.00	---	---	---	---	750	120	40	2	6'6"	67	121	2.7	6
RWF0758	154.00	---	---	---	---	750	208	40	2	6'6"	67	121	2.7	6
RWF0752	154.00	---	---	---	---	750/563	240/208	40	2	6'6"	67	121	2.7	6
RWF0757	154.00	---	---	---	---	750	277	40	2	6'6"	67	121	2.7	6
RWF0753	194.00	RWF0753T	223.00	RWF0753C24	234.00	750	347	40	2	6'6"	67	121	2.7	6
RWF1001	160.00	---	---	---	---	1000	120	40	2	6'6"	76	136	2.7	6
RWF1008	160.00	---	---	---	---	1000	208	40	2	6'6"	76	136	2.7	6
RWF1002	160.00	---	---	---	---	1000/750	240/208	40	2	6'6"	76	136	2.7	6
RWF1007	160.00	---	---	---	---	1000	277	40	2	6'6"	76	136	2.7	6
RWF1003	200.00	RWF1003T	229.00	RWF1003C24	240.00	1000	347	40	2	6'6"	76	136	2.7	6
RWF1251	165.00	---	---	---	---	1250	120	75	2.1	6'10"	65	117	2.7	6
RWF1258	165.00	---	---	---	---	1250	208	75	2.1	6'10"	65	117	2.7	6
RWF1252	165.00	---	---	---	---	1250/938	240/208	75	2.1	6'10"	65	117	2.7	6
RWF1257	165.00	---	---	---	---	1250	277	75	2.1	6'10"	65	117	2.7	6
RWF1253	205.00	RWF1253T	234.00	RWF1253C24	246.00	1250	347	75	2.1	6'10"	65	117	2.7	6
RWF1501	171.00	---	---	---	---	1500	120	75	2.1	6'10"	79	141	2.7	6
RWF1508	171.00	---	---	---	---	1500	208	75	2.1	6'10"	79	141	2.7	6
RWF1502	171.00	---	---	---	---	1500/1125	240/208	75	2.1	6'10"	79	141	2.7	6
RWF1507	171.00	---	---	---	---	1500	277	75	2.1	6'10"	79	141	2.7	6
RWF1503	212.00	RWF1503T	240.00	RWF1503C24	252.00	1500	347	75	2.1	6'10"	79	141	2.7	6
---	---	---	---	---	---	2000	120	75	2.1	6'10"	111	199	2.7	6
RWF2002	183.00	---	---	---	---	2000/1500	240/208	75	2.1	6'10"	111	199	2.7	6
RWF2008	183.00	---	---	---	---	2000	208	75	2.1	6'10"	111	199	2.7	6
RWF2007	183.00	---	---	---	---	2000	277	75	2.1	6'10"	111	199	2.7	6
RWF2003	223.00	RWF2003T	252.00	RWF2003C24	263.00	2000	347	75	2.1	6'10"	111	199	2.7	6

Add W for white or SW for soft white (see [page 8 of the catalogue](#) for optional colours and contact your \*STELPRO representative for all other colours)  
 --- not available

# TECHNICAL DRAWINGS

